

## CLk100 Leak Alarm Controller


The controller can monitor leakage in real time, also have sound-light alarm function.

Once there is a leakage occurs in the interlayer, the liquid will trigger the sensor, and the sensor will send out a signal to the leak alarm controller, when the alarm controller receives signals from the sensor, will automatically determine leakage information and give a lighting display and sound light alarm.

According to the alarm, users can make a timely response and take measures to avoid the occurrence of potential safety hazard and environmental pollution.



- Beautiful and fashionable appearance, easy installation and maintenance
- Explosion-proof design, safe and reliable
- With mute button, can eliminate sound alarm when alarm occurs but do not affect light alarm
- Monitor up to 8 leak sensors

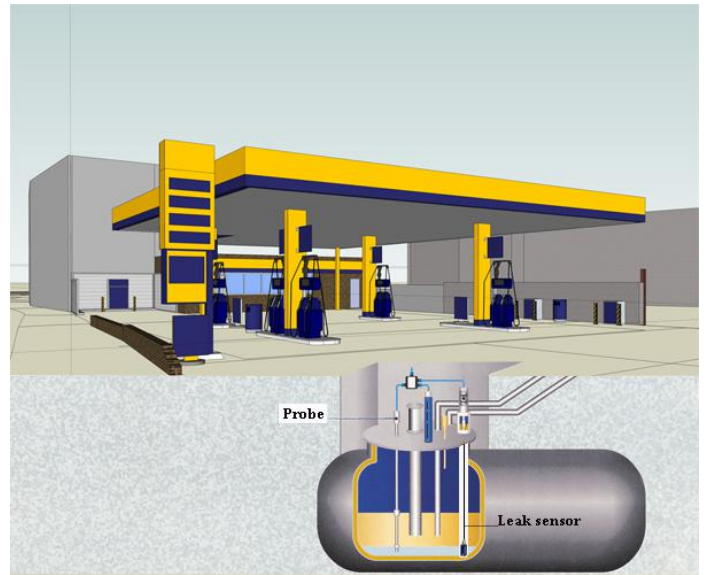

### Technical parameters

- Power supply: AC220V, 0.2A
- Working temperature:  $-20^{\circ}\text{C} \sim +60^{\circ}\text{C}$
- Installation position: safety zone
- Safety barrier: Windbell GSB05
- Alarm mode: sound and light alarm
- Explosion-proof mark: [Exia Ga] II A
- Standard cable length: 3.5m
- Overall dimension: 280\*210\*100mm
- Weight: 2.7kg

### Contact us

#### ZHENGZHOU WINDBELL MEASUREMENT AND CONTROL TECHNOLOGY CO., LTD.

**Add:** No.9, Changchun Rd, High-tech Development Zone, Zhengzhou, China 450001

**Tel:** +86-371-60301609

**Fax:** +86-371-60301612

**E-mail:** sales@windbelltek.com

**Web:** [www.windbellgauge.com](http://www.windbellgauge.com)

**Cell & WhatsApp:** 0086 137 8350 0071

0086 158 3716 0322